


This chapter provides an overview of the Stratix<sup>®</sup> V devices and their features. Many of these devices and features are enabled in the Quartus<sup>®</sup> II software version 11.1. The remaining devices and features will be enabled in future versions of the Quartus II software.

 To find out more about the upcoming Stratix V devices and features, refer to the *Stratix V Upcoming Device Features* document.

Altera's 28-nm Stratix V FPGAs include innovations such as an enhanced core architecture, integrated transceivers up to 28.05 gigabits per second (Gbps), and a unique array of integrated hard intellectual property (IP) blocks. With these innovations, Stratix V FPGAs deliver a new class of application-targeted devices optimized for:

- Bandwidth-centric applications and protocols, including PCI Express<sup>®</sup> (PCIe<sup>®</sup>) Gen3
- Data-intensive applications for 40G/100G and beyond
- High-performance, high-precision digital signal processing (DSP) applications

Stratix V devices are available in four variants (GT, GX, GS, and E), each targeted for a different set of applications. For higher volume production, you can prototype with Stratix V FPGAs and use the low-risk, low-cost path to HardCopy<sup>®</sup> V ASICs.

## Stratix V Family Variants

**Stratix V GT** devices, with both 28.05-Gbps and 12.5-Gbps transceivers, are optimized for applications that require ultra-high bandwidth and performance in areas such as 40G/100G/400G optical communications systems and optical test systems. 28.05-Gbps and 12.5-Gbps transceivers are also known as GT and GX channels, respectively.

**Stratix V GX** devices offer up to 66 integrated 14.1-Gbps transceivers supporting backplanes and optical modules. These devices are optimized for high-performance, high-bandwidth applications such as 40G/100G optical transport, packet processing, and traffic management found in wireline, military communications, and network test equipment markets.

**Stratix V GS** devices have an abundance of variable precision DSP blocks, supporting up to 3,926 18x18 or 1,963 27x27 multipliers. In addition, Stratix V GS devices offer integrated 14.1-Gbps transceivers, which support backplanes and optical modules. These devices are optimized for transceiver-based DSP-centric applications found in wireline, military, broadcast, and high-performance computing markets.

**Stratix V E** devices offer the highest logic density within the Stratix V family with nearly one million logic elements (LEs) in the largest device. These devices are optimized for applications such as ASIC and system emulation, diagnostic imaging, and instrumentation.

Common to all Stratix V family variants are a rich set of high-performance building blocks, including a redesigned adaptive logic module (ALM), 20 Kbit (M20K) embedded memory blocks, variable precision DSP blocks, and fractional phase-locked loops (PLLs). All of these building blocks are interconnected by Altera's superior multi-track routing architecture and comprehensive fabric clocking network.

Also common to Stratix V devices is the new Embedded HardCopy Block, which is a customizable hard IP block that leverages Altera's unique HardCopy ASIC capabilities. The Embedded HardCopy Block in Stratix V FPGAs is used to harden IP instantiation of PCIe Gen3, Gen2, and Gen1 (Gen3/2/1).

## Stratix V Features Summary

- Technology
  - 28-nm TSMC process technology
  - 0.85-V core voltage
- Low-power serial transceivers
  - 28.05-Gbps transceivers on Stratix V GT devices
  - Electronic dispersion compensation (EDC) for XFP, SFP+, QSFP, CFP optical module support
  - Adaptive linear and decision feedback equalization
  - 600-Megabits per second (Mbps) to 14.1-Gbps backplane capability
  - Transmit pre-emphasis and de-emphasis
  - Dynamic reconfiguration of individual channels
  - On-chip instrumentation (EyeQ non-intrusive data eye monitoring)
- General-purpose I/Os (GPIOs)
  - 1.4-Gbps LVDS
  - 1,066-MHz external memory interface
  - On-chip termination (OCT)
  - 1.2-V to 3.3-V interfacing for all Stratix V devices
- Embedded HardCopy Block
  - PCIe Gen3/2/1 complete protocol stack, x1/x2/x4/x8 end point and root port
- Embedded transceiver hard IP
  - Interlaken physical coding sublayer (PCS)
  - Gigabit Ethernet (GbE) and XAUI PCS
  - 10G Ethernet PCS
  - Serial RapidIO<sup>®</sup> (SRIO) PCS
  - Common Public Radio Interface (CPRI) PCS
  - Gigabit Passive Optical Networking (GPON) PCS
- Power Management
  - Programmable Power Technology
  - Quartus II integrated PowerPlay Power Analysis
- High-performance core fabric
  - Enhanced ALM with four registers
  - Improved routing architecture reduces congestion and improves compile times
- Embedded memory blocks
  - M20K: 20-Kbit with hard error correction code (ECC)
  - MLAB: 640-bit
- Variable precision DSP blocks
  - Up to 500 MHz performance
  - Natively support signal processing with precision ranging from 9x9 up to 54x54
  - New native 27x27 multiply mode
  - 64-bit accumulator and cascade for systolic finite impulse responses (FIRs)
  - Embedded internal coefficient memory
  - Pre-adder/subtractor improves efficiency
  - Increased number of outputs allows more independent multipliers
- Fractional PLLs
  - Fractional mode with third-order delta-sigma modulation
  - Integer mode
  - Precision clock synthesis, clock delay compensation, and zero delay buffer (ZDB)
- Clock networks
  - 717-MHz fabric clocking
  - Global, quadrant, and peripheral clock networks
  - Unused clock networks can be powered down to reduce dynamic power
- Device Configuration
  - Serial and parallel flash interface
  - Enhanced advanced encryption standard (AES) design security features
  - Tamper protection
  - Partial and dynamic reconfiguration
  - Configuration via Protocol (CvP)
- High-performance packaging
  - Multiple device densities with identical package footprints enables seamless migration between different FPGA densities
  - FBGA packaging with on-package decoupling capacitors
  - Lead and RoHS-compliant lead-free options
- HardCopy V migration

## Stratix V Family Plan

Table 1-1 lists the Stratix V GT device features.

**Table 1-1. Stratix V GT Device Features**

Feature	5SGTC5	5SGTC7
Logic Elements (K)	425	622
Registers (K)	642	939
28.05/12.5-Gbps Transceivers	4/32	4/32
PCIe hard IP Blocks	1	1
Fractional PLLs	28	28
M20K Memory Blocks	2,304	2,560
M20K Memory (Mbits)	45	50
Variable Precision Multipliers (18x18)	512	512
Variable Precision Multipliers (27x27)	256	256
DDR3 SDRAM x72 DIMM Interfaces	4	4
<b>User I/Os, Full-Duplex LVDS, 28.05/12.5-Gbps Transceivers</b>		
Package <sup>(1), (2), (3)</sup>	5SGTC5	5SGTC7
KF40-F1517 <sup>(4)</sup>	600, 150, 36	600, 150, 36

**Notes to Table 1-1:**

- (1) Packages are flipchip ball grid array (1.0-mm pitch).
- (2) Each package row offers pin migration (common board footprint) for all devices in the row.
- (3) For full package details, refer to *Package Information Datasheet for Altera Devices*.
- (4) Migration between select Stratix V GT devices and Stratix V GX devices is available. For more information, refer to Table 1-5 on page 1-9.

Table 1–2 lists the Stratix V GX device features.

**Table 1–2. Stratix V GX Device Features (Part 1 of 2)**

Features	5SGXA3	5SGXA4	5SGXA5	5SGXA7	5SGXA9	5SGXAB	5SGXB5	5SGXB6
Logic Elements (K)	340	420	490	622	840	952	490	597
Registers (K)	513	634	740	939	1,268	1,437	740	902
14.1-Gbps Transceivers	12, 24, or 36	24 or 36	24, 36, or 48	24, 36, or 48	36 or 48	36 or 48	66	66
PCIe hard IP Blocks	1 or 2	1 or 2	1, 2, or 4	1, 2, or 4	1, 2, or 4	1, 2, or 4	1 or 4	1 or 4
Fractional PLLs	20 <sup>(1)</sup>	24	28	28	28	28	24	24
M20K Memory Blocks	957	1,900	2,304	2,560	2,640	2,640	2,100	2,660
M20K Memory (Mbits)	19	37	45	50	52	52	41	52
Variable Precision Multipliers (18x18)	512	512	512	512	704	704	798	798
Variable Precision Multipliers (27x27)	256	256	256	256	352	352	399	399
DDR3 SDRAM x72 DIMM Interfaces	4	4	6	6	6	6	4	4
<b>User I/Os, Full-Duplex LVDS, 14.1-Gbps Transceivers</b>								
Package <sup>(2), (3), (4), (5)</sup>	5SGXA3	5SGXA4	5SGXA5	5SGXA7	5SGXA9	5SGXAB	5SGXB5	5SGXB6
EH29-H780	360, 90, 12 <sup>H</sup>	—	—	—	—	—	—	—
HF35-F1152 <sup>(6)</sup>	432, 108, 24	552, 138, 24	552, 138, 24	552, 138, 24	—	—	—	—
KF35-F1152	432, 108, 36	432, 108, 36	432, 108, 36	432, 108, 36	—	—	—	—
KF40-F1517 / KH40-H1517 <sup>(6)</sup>	696, 174, 36	696, 174, 36	696, 174, 36	696, 174, 36	696, 174, 36 <sup>H</sup>	696, 174, 36 <sup>H</sup>	—	—
NF40-F1517 <sup>(7)</sup>	—	—	600, 150, 48	600, 150, 48	—	—	—	—
RF40-F1517	—	—	—	—	—	—	432, 108, 66	432, 108, 66
RF43-F1760	—	—	—	—	—	—	600, 150, 66	600, 150, 66

**Table 1–2. Stratix V GX Device Features (Part 2 of 2)**

Features	5SGXA3	5SGXA4	5SGXA5	5SGXA7	5SGXA9	5SGXAB	5SGXB5	5SGXB6
NF45-F1932 <sup>(6)</sup>	—	—	840, 210, 48	840, 210, 48	840, 210, 48	840, 210, 48	—	—

**Notes to Table 1–2:**

- (1) The F1517 package contains 24 PLLs. The other packages with this device contain 20 PLLs.
- (2) Packages are flipchip ball grid array (1.0-mm pitch).
- (3) LVDS counts are full duplex channels. Each full duplex channel is one transmitter (TX) pair plus one receiver (RX) pair.
- (4) Each package row offers pin migration (common circuit board footprint) for all devices in the row.
- (5) <sup>H</sup> indicates a Hybrid package.
- (6) Migration between select Stratix V GX devices and Stratix V GS devices is available. For more information, refer to [Table 1–5 on page 1–9](#).
- (7) Migration between select Stratix V GX devices and Stratix V GT devices is available. For more information, refer to [Table 1–5 on page 1–9](#).

Table 1-3 lists the Stratix V GS device features.

**Table 1-3. Stratix V GS Device Features**

Features	5SGSD3	5SGSD4	5SGSD5	5SGSD6	5SGSD8
Logic Elements (K)	236	360	457	583	695
Registers (K)	356	543	690	880	1,050
14.1-Gbps transceivers	12 or 24	12, 24, or 36	24 or 36	36 or 48	36 or 48
PCIe hard IP blocks	1	1	1	1, 2, or 4	1, 2, or 4
Fractional PLLs	20	20 <sup>(1)</sup>	24	28	28
M20K Memory Blocks	688	957	2,014	2,320	2,567
M20K Memory (Mbits)	13	19	39	45	50
Variable Precision Multipliers (18x18)	1,200	2,088	3,180	3,550	3,926
Variable Precision Multipliers (27x27)	600	1,044	1,590	1,775	1,963
DDR3 SDRAM x72 DIMM Interfaces	2	4	4	6	6
<b>User I/Os, Full-Duplex LVDS, 14.1-Gbps Transceivers</b>					
Package <sup>(2), (3), (4), (5)</sup>	5SGSD3	5SGSD4	5SGSD5	5SGSD6	5SGSD8
EH29-H780	360, 90, 12 <sup>H</sup>	360, 90, 12 <sup>H</sup>	—	—	—
HF35-F1152 <sup>(6)</sup>	432, 108, 24	432, 108, 24	552, 138, 24	—	—
KF40-F1517 <sup>(6)</sup>	—	696, 174, 36	696, 174, 36	696, 174, 36	696, 174, 36
NF45-F1932 <sup>(6)</sup>	—	—	—	840, 210, 48	840, 210, 48

**Notes to Table 1-3:**

- (1) The F1517 package contains 24 PLLs. The other packages with this device contain 20 PLLs.
- (2) Packages are flipchip ball grid array (1.0-mm pitch).
- (3) LVDS counts are full duplex channels. Each full duplex channel is one TX pair plus one RX pair.
- (4) Each package row offers pin migration (common circuit board footprint) for all devices in the row.
- (5) <sup>H</sup> indicates a Hybrid package.
- (6) Migration between select Stratix V GS devices and Stratix V GX devices is available. For more information, refer to [Table 1-5 on page 1-9](#).

Table 1-4 lists the Stratix V E device features.

**Table 1-4. Stratix V E Device Features**

<b>Features</b>	<b>5SEE9</b>	<b>5SEEB</b>
Logic Elements (K)	840	952
Registers (K)	1,268	1,437
Fractional PLLs	28	28
M20K Memory Blocks	2,640	2,640
M20K Memory (Mbits)	52	52
Variable Precision Multipliers (18x18)	704	704
Variable Precision Multipliers (27x27)	352	352
DDR3 SDRAM x72 DIMM Interfaces	6	6
<b>User I/Os, Full-Duplex LVDS</b>		
<b>Package (1), (2), (3), (4)</b>	<b>5SEE9</b>	<b>5SEEB</b>
H40-H1517	696, 174 <sup>H</sup>	696, 174 <sup>H</sup>
F45-F1932	840, 210	840, 210

**Notes to Table 1-4:**

- (1) Packages are flipchip ball grid array (1.0-mm pitch).
- (2) LVDS counts are full duplex channels. Each full duplex channel is one TX pair plus one RX pair.
- (3) Each package row offers pin migration (common circuit board footprint) for all devices in the row.
- (4) <sup>H</sup> indicates a Hybrid package.

Each row in Table 1–5 lists which devices allow migration.

**Table 1–5. Device Migration List Across All Stratix V Device Variants <sup>(1)</sup>**

Package	Stratix V GX								Stratix V GT		Stratix V GS					Stratix V E	
	A3	A4	A5	A7	A9	AB	B5	B6	C5	C7	D3	D4	D5	D6	D8	E9	EB
EH29-H780	✓										✓	✓					
HF35-F1152 <sup>(2)</sup>	✓	✓	✓	✓							✓	✓	✓				
KF35-F1152	✓	✓	✓	✓													
KF40-F1517 / KH40-H1517	✓	✓	✓	✓	✓	✓						✓	✓	✓	✓		
NF40 / KF40-F1517 <sup>(3)</sup>			✓	✓					✓	✓							
RF40-F1517							✓	✓									
H40-H1517																✓	✓
RF43-F1760							✓	✓									
NF45-F1932			✓	✓	✓	✓								✓	✓		
F45-F1932																✓	✓

**Notes to Table 1–5:**

- (1) All devices in a given row allow migration.
- (2) All devices in this row are in the HF35 package and have twenty-four 14.1-Gbps transceivers.
- (3) The 5SGTC5/7 devices in the KF40 package have four 28.05-Gbps transceivers and thirty-two 12.5-Gbps transceivers. Other devices in this row are in the NF40 package and have forty-eight 14.1-Gbps transceivers.


## Low-Power Serial Transceivers

Stratix V FPGAs deliver the industry's most flexible transceivers with the highest bandwidth from 600 Mbps to 28.05 Gbps, low bit error ratio (BER), and low power. Stratix V transceivers have many enhancements to improve flexibility and robustness. These enhancements include robust analog receive clock and data recovery (CDR), advanced pre-emphasis, and equalization. In addition, all transceivers are identical with the full featured embedded PCS hard IP to simplify the design, lower the power, and save valuable core resources.

Stratix V transceivers are compliant with a wide range of standard protocols and data rates and are equipped with a variety of signal-conditioning features to support backplane, optical module, and chip-to-chip applications.

Stratix V transceivers are located on the left and right sides of the device, as shown in [Figure 1-1](#). The transceivers are isolated from the rest of the chip to prevent core and I/O noise from coupling into the transceivers, thereby ensuring optimal signal integrity. The transceiver channels consist of the physical medium attachment (PMA), PCS, and high-speed clock networks. You can also use the unused transceiver PMA channels as additional transmit PLLs. [Table 1-6](#) lists the transceiver PMA features.

**Figure 1-1. Stratix V GT, GX, and GS Device Chip View <sup>(1)</sup>**

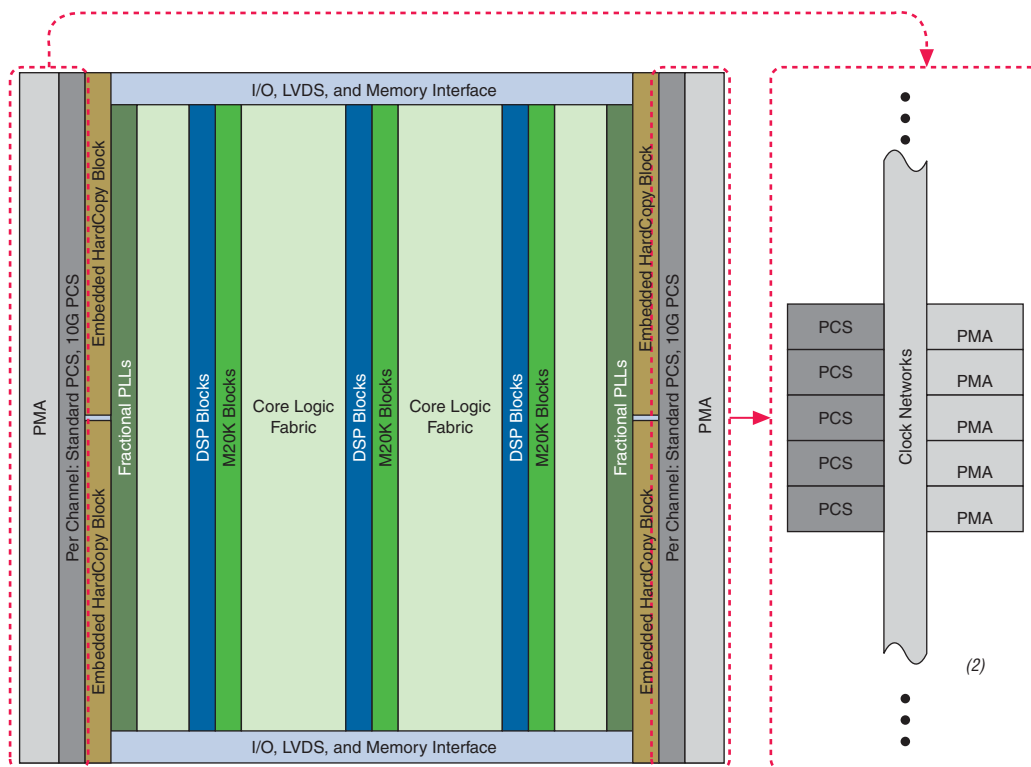

**Notes to Figure 1-1:**

- (1) This figure represents a given variant of a Stratix V device with transceivers. Other variants may have a different floorplan than the one shown here.
- (2) You can use the unused transceiver channels as additional transceiver transmit PLLs.

Table 1-6 lists the PMA features for the Stratix V transceivers.

**Table 1-6. Transceiver PMA Features**

Feature	Capability
Backplane support	10GBASE-R, 14.1 Gbps (Stratix V GX and GS devices), 12.5 Gbps (Stratix V GT devices)
Cable driving support	PCIe cable and eSATA applications
Optical module support with EDC	10G Form-factor Pluggable (XFP), Small Form-factor Pluggable (SFP+), Quad Small Form-factor Pluggable (QSFP), CXP, 100G Pluggable (CFP), 100G Form-factor Pluggable
Chip-to-chip support	28.05 Gbps and 12.5 Gbps (Stratix V GT devices) and 14.1 Gbps (Stratix V GX and GS devices)
Continuous Time Linear Equalization (CTLE)	Receiver 4-stage linear equalization to support high-attenuation channels
Decision Feedback Equalization (DFE)	Receiver 5-tap digital equalizer to minimize losses and crosstalk
Adaptive equalization (AEQ)	Adaptive engine to automatically adjust equalization to compensate for changes over time
PLL-based clock recovery	Superior jitter tolerance versus phase interpolation techniques
Programmable deserialization and word alignment	Flexible deserialization width and configurable word alignment patterns
Transmit equalization (pre-emphasis)	Transmit driver 4-tap pre-emphasis and de-emphasis for protocol compliance under lossy conditions
Ring and logic cell oscillator transmit PLLs	Choice of transmit PLLs per channel, optimized for specific protocols and applications
On-chip instrumentation (EyeQ data-eye monitor)	Allows non-intrusive on-chip monitoring of both width and height of the data eye
Dynamic reconfiguration	Allows reconfiguration of single channels without affecting operation of other channels
Protocol support	Compliance with over 50 industry standard protocols in the range of 600 Mbps to 28 Gbps

The Stratix V core logic connects to the PCS through an 8-, 10-, 16-, 20-, 32-, 40-, 64-, or 66-bit interface, depending on the transceiver data rate and protocol. Stratix V devices contain PCS hard IP to support PCIe Gen3/2/1, Interlaken, 10GE, XAUI, GbE, SRIO, CPRI, and GPON protocols. All other standard and proprietary protocols are supported through the transceiver PCS hard IP. Table 1-7 lists the transceiver PCS features.

**Table 1-7. Transceiver PCS Features (Part 1 of 2)**

Protocol	Data Rates (Gbps)	Transmit Data Path	Receiver Data Path
Custom PHY	0.6 to 8.5	Phase compensation FIFO, byte serializer, 8B/10B encoder, bit-slip, and channel bonding	Word aligner, de-skew FIFO, rate match FIFO, 8B/10B decoder, byte deserializer, and byte ordering
Custom 10G PHY	9.98 to 14.1	TX FIFO, gear box, and bit-slip	RX FIFO and gear box
x1, x4, x8 PCIe Gen1/2	2.5 and 5.0	Same as custom PHY plus PIPE 2.0 interface to core logic	Same as custom PHY plus PIPE 2.0 interface to core logic

**Table 1–7. Transceiver PCS Features (Part 2 of 2)**

Protocol	Data Rates (Gbps)	Transmit Data Path	Receiver Data Path
x1, x4, x8 PCIe Gen3	8	Phase compensation FIFO, encoder, scrambler, gear box, and bit slip	Block synchronization, rate match FIFO, decoder, de-scrambler, and phase compensation FIFO
10G Ethernet	10.3125	TX FIFO, 64/66 encoder, scrambler, and gear box	RX FIFO, 64/66 decoder, de-scrambler, block synchronization, and gear box
Interlaken	4.9 to 10.3125	TX FIFO, frame generator, CRC-32 generator, scrambler, disparity generator, and gear box	RX FIFO, frame generator, CRC-32 checker, frame decoder, descrambler, disparity checker, block synchronization, and gearbox
40GBASE-R Ethernet	4 x 10.3125	TX FIFO, 64/66 encoder, scrambler, alignment marker insertion, gearbox, and block striper	RX FIFO, 64/66 decoder, de-scrambler, lane reorder, deskew, alignment marker lock, block synchronization, gear box, and destriper
100GBASE-R Ethernet	10 x 10.3125		
OTN 40 and 100	(4 +1) x 11.3	TX FIFO, channel bonding, and byte serializer	RX FIFO, lane deskew, and byte de-serializer
	(10 +1) x 11.3		
GbE	1.25	Same as custom PHY plus GbE state machine	Same as custom PHY plus GbE state machine
XAUI	3.125 to 4.25	Same as custom PHY plus XAUI state machine for bonding four channels	Same as custom PHY plus XAUI state machine for re-aligning four channels
SRIO	1.25 to 6.25	Same as custom PHY plus SRIO V2.1 compliant x2 and x4 channel bonding	Same as custom PHY plus SRIO V2.1-compliant x2 and x4 deskew state machine
CPRI	0.6144 to 9.83	Same as custom PHY plus TX deterministic latency	Same as custom PHY plus RX deterministic latency
GPON	1.25, 2.5, and 10	Same as custom PHY	Same as custom PHY

## PCIe Gen3/2/1 Hard IP (Embedded HardCopy Block)

Stratix V devices have PCIe hard IP designed for performance, ease-of-use, and increased functionality. The PCIe hard IP consists of the PCS, data link, and transaction layers. The PCIe hard IP supports Gen3/2/1 end point and root port up to x8 lane configurations.

The Stratix V PCIe hard IP operates independently from the core logic, which allows the PCIe link to wake up and complete link training in less than 100 ms while the Stratix V device completes loading the programming file for the rest of the FPGA. The PCIe hard IP also provides added functionality, which makes it easier to support emerging features such as Single Root I/O Virtualization (SR-IOV) or optional protocol extensions. In addition, the Stratix V device PCIe hard IP has improved end-to-end data path protection using ECC and enables device CvP.

In all Stratix V devices, the primary PCIe hard IP that supports CvP is always in the bottom left corner of the device (IOBANK\_B0L) when looking at the top view of the die.

## External Memory and GPIO

Each Stratix V I/O block has a hard FIFO that improves the resynchronization margin as data is transferred from memory to the FPGA. The hard FIFO also lowers PHY latency, resulting in higher random access performance. GPIOs include on-chip dynamic termination to reduce the number of external components and minimize reflections. On-package decoupling capacitors suppress noise on the power lines, which reduce noise coupling into the I/Os. Memory banks are isolated to prevent core noise from coupling to the output, thus reducing jitter and providing optimal signal integrity.

The external memory interface block also uses advanced calibration algorithms to compensate for process, voltage and temperature (PVT) variations in the FPGA and external memory components. The advanced algorithms ensure maximum bandwidth and a robust timing margin across all conditions. Stratix V devices also deliver a complete memory solution with the High Performance Memory Controller II (HPMC II) and UniPHY MegaCore<sup>®</sup> IP that simplify a design for today's advanced memory modules. [Table 1-8](#) lists external memory interface block performance.

**Table 1-8. External Memory Interface Performance <sup>(1)</sup>**

Interface	Performance (MHz)
DDR3	1,066
DDR2	533
QDR II	350
QDR II+	550
RLDRAM II	533
RLDRAM III	800

**Note to [Table 1-8](#):**

- (1) The specifications listed in this table are performance targets. For a current achievable performance, use the [External Memory Interface Spec Estimator](#).

## Adaptive Logic Module

Stratix V devices use an improved ALM to implement logic functions more efficiently. The Stratix V ALM has eight inputs with a fracturable look-up table (LUT), two dedicated embedded adders, and four dedicated registers.

The Stratix V ALM has the following enhancements:

- Packs 6% more logic when compared with the ALM found in Stratix IV devices
- Implements select 7-input LUT-based functions, all 6-input logic functions, and two independent functions consisting of smaller LUT sizes (such as two independent 4-input LUTs) to optimize core usage
- Adds more registers (four registers per 8-input fracturable LUT). More registers allow Stratix V devices to maximize core performance at a higher core logic usage and provides easier timing closure for register-rich and heavily pipelined designs.

The Quartus II software leverages the Stratix V ALM logic structure to deliver the highest performance, optimal logic usage, and lowest compile times. The Quartus II software simplifies design re-use because it automatically maps legacy Stratix designs into the new Stratix V ALM architecture.

## Clocking

The Stratix V device core clock network is designed to support 717-MHz fabric operations and 1,066-MHz and 1,600-Mbps external memory interfaces. The clock network architecture is based on Altera's proven global, quadrant, and peripheral clock structure, which is supported by dedicated clock input pins and fractional clock synthesis PLLs. The Quartus II software identifies all unused sections of the clock network and powers them down, which reduces power consumption.

## Fractional PLL

Stratix V devices have up to 28 fractional PLLs that you can use to reduce both the number of oscillators required on the board and the clock pins used in the FPGA by synthesizing multiple clock frequencies from a single reference clock source. In addition, you can use the fractional PLLs for clock network delay compensation, zero delay buffering, and transmit clocking for transceivers. Fractional PLLs may be individually configured for integer mode or fractional mode with third-order delta-sigma modulation.

## Embedded Memory

Stratix V devices contain two types of embedded memory blocks: MLAB (640-bit) and M20K (20-Kbit). MLAB blocks are ideal for wide and shallow memories. M20K blocks are useful for supporting larger memory configurations and include ECC. Both types operate at up to 600 MHz and are configurable to be a single- or dual-port RAM, FIFO, ROM, or shift register. These memory blocks are flexible and support a number of memory configurations, as shown in [Table 1-9](#).

**Table 1-9. Embedded Memory Block Configuration**

MLAB (640 Bits)	M20K (20,480 Bits)
	512x40
	1Kx20
32x20	2Kx10
64x10	4Kx5
	8Kx2
	16Kx1

The Quartus II software simplifies design re-use by automatically mapping memory blocks from legacy Stratix devices into the Stratix V memory architecture.

## Variable Precision DSP Block

Stratix V FPGAs feature the industry's first variable precision DSP block that you can configure to natively support signal processing with precision ranging from 9x9 to 36x36.

You can independently configure each DSP block at compile time as either a dual 18x18 multiply accumulate or a single 27x27 multiply accumulate. With a dedicated 64-bit cascade bus, you can cascade multiple variable precision DSP blocks to implement even higher precision DSP functions efficiently. [Table 1-10](#) lists how different precision is accommodated within a DSP block or by using multiple blocks.

**Table 1-10. Variable Precision DSP Block Configurations**

Multiplier Size (bits)	DSP Block Resources	Expected Usage
9x9	1/3 of variable precision DSP block	Low precision fixed point
18x18	1/2 of variable precision DSP block	Medium precision fixed point
27x27	1 variable precision DSP block	High precision fixed or single precision floating point
36x36	2 variable precision DSP blocks	Very high precision fixed point

Complex multiplication is common in DSP algorithms. One of the most popular applications of complex multipliers is the fast Fourier transform (FFT) algorithm. This algorithm has the characteristic of increasing precision requirements on only one side of the multiplier. The variable precision DSP block is designed to support the FFT algorithm with a proportional increase in DSP resources with precision growth. Table 1–11 lists complex multiplication with variable precision DSP blocks.

**Table 1–11. Complex Multiplication with Variable Precision DSP Blocks**

Multiplier Size (bits)	DSP Block Resources	Expected Usage
18x18	2 variable precision DSP blocks	Resource optimized FFTs
18x25	3 variable precision DSP blocks	Accommodate bit growth through FFT stages
18x36	4 variable precision DSP blocks	Highest precision FFT stages
27x27	4 variable precision DSP blocks	Single precision floating point

Additionally, for FFT applications with high dynamic range requirements, only the Altera® FFT MegaCore offers an option of single precision floating point implementation, with the resource usage and performance similar to high-precision fixed point implementations.

Other new features include:

- 64-bit accumulator, the largest in the industry
- Hard pre-adder, available in both 18- and 27-bit modes
- Cascaded output adders for efficient systolic FIR filters
- Internal coefficient register banks
- Enhanced independent multiplier operation
- Efficient support for single- and double-precision floating point arithmetic
- Ability to infer all the DSP block modes through HDL code using the Quartus II design suite.

The variable precision DSP block is ideal for higher bit precision in high-performance DSP applications. At the same time, the variable precision DSP block can efficiently support the many existing 18-bit DSP applications, such as high definition video processing and remote radio heads. Stratix V FPGAs, with the variable precision DSP block architecture, are the only FPGA family that can efficiently support many different precision levels, up to and including floating point implementations. This flexibility results in increased system performance, reduced power consumption, and reduced architecture constraints on system algorithm designers.

## Power Management

Stratix V devices leverage FPGA architectural features and process technology advancements to reduce total power consumption by as much as 30% when compared with Stratix IV devices at the same performance level.

Stratix V devices continue to provide programmable power technology, introduced in earlier generations of Stratix FPGA families. The Quartus II software PowerPlay feature identifies critical timing paths in a design and biases core logic in that path for high performance. The PowerPlay feature also identifies non-critical timing paths and biases core logic in that path for low power instead of high performance. PowerPlay automatically biases core logic to meet performance and optimize power consumption.

Additionally, Stratix V devices have a number of hard IP blocks that not only reduce logic resources but also deliver substantial power savings when compared with soft implementations. The list includes PCIe Gen1/Gen2/Gen3, Interlaken PCS, hard I/O FIFOs, and transceivers. Hard IP blocks consume up to 50% less power than equivalent soft implementations.

Stratix V transceivers are also designed for power efficiency. As a result, the transceiver channels consume 50% less power than the previous generation of Stratix FPGAs. The transceiver PMA consumes approximately 90 mW at 6.5 Gbps and 170 mW at 12.5 Gbps.

## Incremental Compilation

The Quartus II software incremental compilation feature reduces compilation time by up to 70% and preserves performance to ease timing closure. Incremental compilation supports top-down, bottom-up, and team-based design flows. The incremental compilation feature facilitates modular hierarchical and team-based design flows where different designers compile their respective sections of a design in parallel. Furthermore, different designers or IP providers can develop and optimize different blocks of the design independently, which you can then import into the top-level project.

## Enhanced Configuration and CvP

Stratix V device configuration is enhanced for ease-of-use, speed, and cost. Stratix V devices support a new 4-bit bus active serial mode (ASx4). ASx4 supports up to a 400-Mbps data rate using small low-cost quad interface Flash devices. ASx4 mode is easy to use and offers an ideal balance between cost and speed. Finally, the fast passive parallel (FPP) interface is enhanced to support 8-, 16-, and 32-bit data widths to meet a wide range of performance and cost goals.

You can configure Stratix V FPGAs using CvP with PCIe. CvP with PCIe separates the configuration process into two parts: the PCIe hard IP and periphery and the core logic fabric. CvP uses a much smaller amount of external memory (flash or ROM) because CvP only has to store the configuration file for the PCIe hard IP and periphery. Also, the 100-ms power-up to active time (for PCIe) is much easier to

achieve when only the PCIe hard IP and periphery are loaded. After the PCIe hard IP and periphery are loaded and the root port is booted up, application software running on the root port can send the configuration file for the FPGA fabric across the PCIe link where it is loaded into the FPGA. The FPGA is then fully configured and functional.

Table 1–12 lists the available configuration modes for Stratix V devices.

**Table 1–12. Configuration Modes for Stratix V Devices**

Mode	Fast or Slow POR	Compression	Encryption	Remote Update	Data Width	Max Clock Rate (MHz)	Max Data Rate (Mbps)
Active Serial (AS)	✓	✓	✓	✓	1, 4	100	400
Passive Serial (PS)	✓	✓	✓	—	1	125	125
Fast Passive Parallel (FPP)	✓	✓	✓	(1)	8, 16, 32	125	3,000
CvP	—	—	✓	✓	1, 2, 4, 8	—	3,000
Partial Reconfiguration	—	—	✓	✓	16	125	2,000
JTAG	—	—	—	—	1	33	33

**Note to Table 1–12:**

(1) Remote update support with the Parallel Flash Loader.

## Partial Reconfiguration

Partial reconfiguration allows you to reconfigure part of the FPGA while other sections continue to operate. This capability is required in systems where uptime is critical because partial reconfiguration allows you to make updates or adjust functionality without disrupting services. While lowering power and cost, partial reconfiguration also increases the effective logic density by removing the necessity to place the FPGA functions that do not operate simultaneously. Instead, you can store these functions in external memory and load them as required. This reduces the size of the FPGA by allowing multiple applications on a single FPGA, saving board space and reducing power.

Up to now, partial reconfiguration solutions have been time-intensive tasks that required you to know all of the intricate FPGA architecture details. Altera simplifies the partial reconfiguration process by building the capability on top of the proven incremental compilation design flow in its Quartus II design software.

Partial reconfiguration is supported through the following configuration options:

- Partial reconfiguration through the FPP x16 I/O interface
- CvP
- Soft internal core, such as the Nios<sup>®</sup> II processor.

## Automatic Single Event Upset (SEU) Error Detection and Correction

Stratix V devices offer new SEU error detection and correction circuitry that is robust and easy to use. The correction circuitry includes protection for configuration RAM (CRAM) programming bits and user memories. The CRAM is protected by a continuously running cyclical redundancy check (CRC) error detection circuit with integrated ECC that automatically corrects one or two errors and detects higher order multi-bit errors. When more than two errors occur, correction is available through a core programming file reload that provides a complete design refresh while the FPGA continues to operate.

Furthermore, the physical layout of the FPGA is optimized to make the majority of multi-bit upsets appear as independent single- or double-bit errors, which are automatically corrected by the integrated CRAM ECC circuitry. In addition to the CRAM protection in Stratix V devices, user memories include integrated ECC circuitry and are layout-optimized to enable error detection of 12-bit errors and correction for 8-bit errors.

## HardCopy V Devices


HardCopy V ASICs offer the lowest risk and lowest total cost in ASIC designs with embedded high-speed transceivers. You can prototype and debug with Stratix V FPGAs, then use HardCopy V ASICs for volume production. The proven turnkey process creates a functionally equivalent HardCopy V ASIC with or without embedded transceivers to meet all timing constraints in as little as 12 weeks.

The powerful combination of Stratix V FPGAs and HardCopy V ASICs can help you meet your design requirements. Whether you plan for ASIC production and require the lowest-risk, lowest-cost path from specification to production or require a cost reduction path for your FPGA-based systems, Altera provides the optimal solution for power, performance, and device bandwidth.

## Ordering Information

This section describes ordering information for Stratix V GT, GX, GS, and E devices. [Figure 1-2](#) shows the ordering codes for Stratix V devices.

**Figure 1-2. Ordering Information for Stratix V Devices**

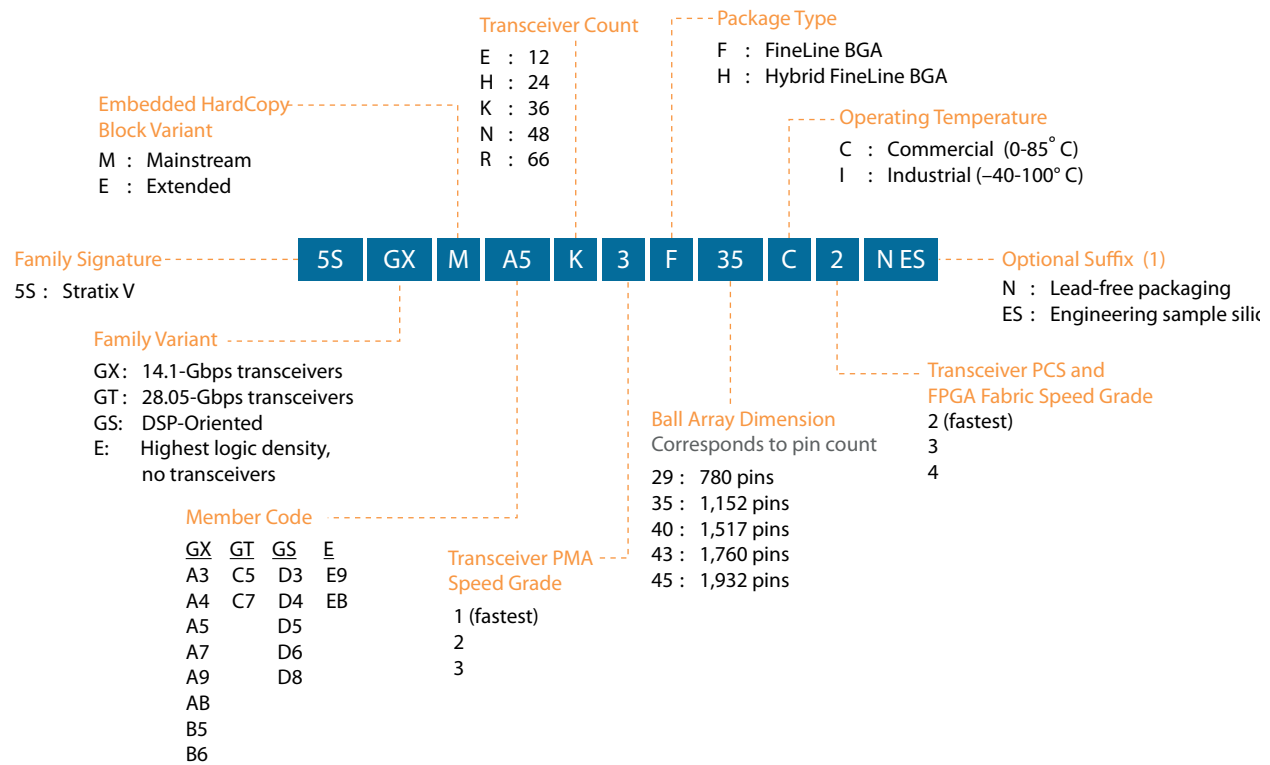

**Note to Figure 1-2:**

(1) You can select one or both of these options, or you can ignore these options.

## Revision History

Table 1-13 lists the revision history for this chapter.

**Table 1-13. Revision History**

Date	Version	Changes Made
December 2011	2.2	Updated Table 1-2 and Table 1-3.
November 2011	2.1	<ul style="list-style-type: none"> <li>■ Changed Stratix V GT transceiver speed from 28 Gbps to 28.05 Gbps.</li> <li>■ Updated Figure 1-2.</li> </ul>
November 2011	2.0	<ul style="list-style-type: none"> <li>■ Revised Figure 1-2.</li> <li>■ Updated Table 1-5.</li> <li>■ Minor text edits.</li> </ul>
September 2011	1.10	Updated Table 1-2, Table 1-3, and Table 1-4.
September 2011	1.9	<ul style="list-style-type: none"> <li>■ Updated Table 1-1, Table 1-2, Table 1-3, Table 1-4, and Table 1-5.</li> <li>■ Updated Figure 1-2.</li> <li>■ Minor text edits.</li> </ul>
June 2011	1.8	Changed 800 MHz to 1,066 MHz for DDR3 in Table 1-8 and in text.
May 2011	1.7	<ul style="list-style-type: none"> <li>■ For Stratix V GT devices, changed 14.1 Gbps to 12.5 Gbps.</li> <li>■ Changed Configuration via PCIe to Configuration via Protocol</li> <li>■ Updated Table 1-1, Table 1-2, Table 1-3, Table 1-4, Table 1-5, and Table 1-6.</li> <li>■ Chapter moved to Volume 1.</li> </ul>
January 2011	1.6	<ul style="list-style-type: none"> <li>■ Added Stratix V GS information.</li> <li>■ Updated tables listing device features.</li> <li>■ Added device migration information.</li> <li>■ Updated 12.5-Gbps transceivers to 14.1-Gbps transceivers</li> </ul>
December 2010	1.5	Updated Table 1-1.
December 2010	1.4	<ul style="list-style-type: none"> <li>■ Updated Table 1-1.</li> <li>■ Updated Figure 1-2.</li> <li>■ Converted to the new template.</li> <li>■ Minor text edits.</li> </ul>
July 2010	1.3	Updated Table 1-5
July 2010	1.2	<ul style="list-style-type: none"> <li>■ Updated “Features Summary” on page 1-2</li> <li>■ Updated resource counts in Table 1-1 and Table 1-2</li> <li>■ Removed “Interlaken PCS Hard IP” and “10G Ethernet Hard IP”</li> <li>■ Added “40G and 100G Ethernet Hard IP (Embedded HardCopy Block)” on page 1-7</li> <li>■ Added information about Configuration via PCIe</li> <li>■ Added “Partial Reconfiguration” on page 1-12</li> <li>■ Added “Ordering Information” on page 1-14</li> </ul>
May 2010	1.1	Updated part numbers in Table 1-1 and Table 1-2
April 2010	1.0	Initial release

